



⚡ 3 kW Electrical heat

Length: 0.6 metres



Door heater PA1006

For increased comfort inside the door

Application

PA1006 is a compact door heater which heats the incoming air and gives increased comfort on the inside. When wall mounted, the unit can act as a stationary fan heater.

Comfort

The cold incoming air is heated by the door heater and a good level of comfort heat is obtained inside the door. The bracket included in delivery makes it possible to angle the unit 30° out from the wall, which gives an even heat distribution in the premises.

Operation and economy

The door heater is easy to use and is controlled by a switch located on the unit.


Design

The door heater has a clean, straight forward design. As the air inlet is placed on top of the unit the front of the unit is kept free of dirt and dust.

Product specifications

- Compact and easy to position.
- Low sound level.
- The unit is easily angled on the bracket, which is used for both wall and ceiling mounting.
- Integrated control.
- Corrosion proof housing made of hot zinc-plated and powder lacquered steel panels. Colour front: RAL 9016, NCS 0500 (white). Colour grille, rear section and ends: RAL 9005 (black).

Air velocity profile

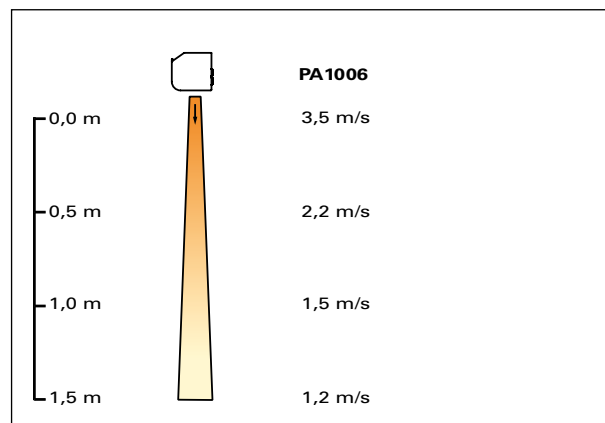

Technical specifications | Thermozone PA 1006, door heater ⚡

Type	Output [kW]	Airflow [m³/h]	Δt* ¹ [°C]	Sound level* ² [dB(A)]	Voltage [V]	Amperage [A]	Length [mm]	Weight [kg]
PA1006E03	0/1,5/3	230	39	44	240V~	12,8	650	5,3

*1) Δt = temperature rise of passing air at maximum heat output.

*2) Conditions: Distance to the unit 5 metres. Directional factor: 2. Equivalent absorption area: 200 m².

Protection class: IP20.
CE compliant.

Dimensions

